

SLIDING DOOR: INSTALLATION INSTRUCTION

SYSTEM 26/34/42

Version 1.8 (2018-04-25)

4.09.2.c



Subject to technical changes.



CONTENT AND TOOLS

CONTENT:

Content and tools	page	02
Product information	page	03
Manual	page	05
Accessories	page	06
Installation instruction	page	07
Detail drawings	page	13

- TOOLS:

(without claim of completeness)
- Hack saw

■ Allen key set

■ Percussion drilling machine

■ Drill set metall / stone

■ Cordless screwdriver with recessed head bits

■ Screwdriver set

■ Rubber mallet

■ Pencil and adhesive tape

■ Water level

■ Straight edge (optional)



- VERSION INFORMATION:

Version 1.4

Series name added p.15

1.5

Bottom and top track S 1200 Extra leaf p.17

1.6

Bottom and top track dimensions adjusted

1.7

S 8000 added

1.8








Bottom track triple, surf.closed added

PRODUCT INFORMATION

GENERAL INFORMATION: Preparation

- This manual is part of the product and describes the safe and proper installation of the system. Please read the instructions carefully before installation
- Please note that the assembly should only be done by qualified and trained staff in strict compliance with all details indicated in this document. Improper installation in variation from manufacturer's specification may cause defects and danger, thus endangering the safe fixing of the product as well as the safety of the prospective user. The liability of the manufacturer shall be excluded in case of defects and consequential damages resulting from incorrect assembly of this product.
- Please check the completeness of the delivered parts and check carefully if any transport damages are visible.
- If any parts are damaged or lost, please immediately contact the responsible supplier.
- It is assumed that you have exactly identified all cutting dimensions according to the measurement instruction for **raumplus** products.

SYMBOLE:

Symbol	Importance
	Risk or danger!
	Advice and information
	Additional information / other documents
	Directional data / direction of movement
	„yes“ and „right“
	„no“ and „wrong“
	Follow the order

PRODUCT INFORMATION

GENERAL INFORMATION: **Product safety**

- The door system complies with the prior of the art and the authorized safety rules at the time of delivery.

USE:

Intended use

- The prerequisite for the intended use of our products is the professional installation according to our installation instruction. Sufficient fittings must be available and durably installed to all relevant places.
The function of the fitting must not be hindered or altered during installation.
- Special solutions are only possible in consultation with **raumplus**.

Use not as intended


- Risk or danger may occur in the following cases:
 - the door system has improperly been installed or maintained
 - the safety and installation instructions have not been followed.
 - after improper installation or inadequate fixing (e.g. to parts of buildings)
 - the maximum weight of the doors has been exceeded.
 - improper shock and case loads or other additional loads on the fittings have occurred
 - the fittings have been used outside.
 - body parts or objects got into the closing edges or door runnings during use of the door wing.
 - the door system is not used as intended.

Structural modifications

- Structural modifications that are not offered as an accessory from **raumplus** may only be attached or installed with permission of **raumplus GmbH**!

MANUAL

This manual is part of the delivered product and describes the safe and proper use.

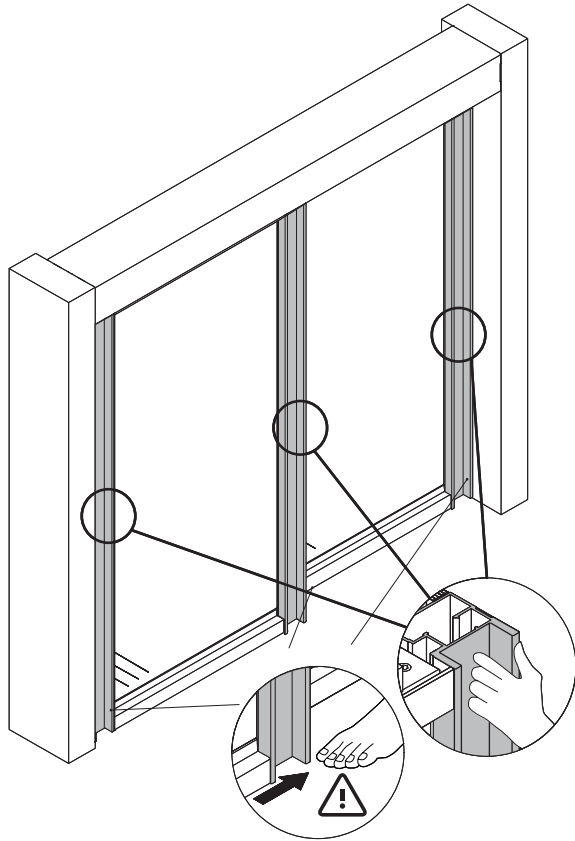

Designated use:

The product is designed and manufactured for indoor use.

The product was designed as a hand-guided sliding door that is usually not being moved faster than walking speed and should be stopped manually when reaching the end position. The doors are guided on top and bottom track.

Any other use that deviates from the specific proper use is not according to the **raumplus** regulations.

Manual:


Open the door by using the handle profile or the handle (optional).

Guide the door slowly to the
... opening / closing point, or
... activating point of the sliding door brake (optional).

Attention:

Preserve your hands from getting trapped during the movement of the door. When closing or opening the door never take hold of the profile, only use the handle profile or the handle.

Use the door as instructed.

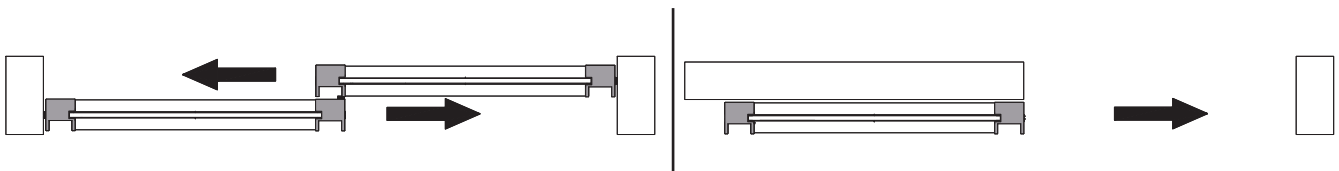


Safety Information:

The product complies with the prior of the art and the approved safety rules at the time of delivery.


- Pay attention to child safety.
- No additional load to the doors.
- Structural changes, additions or modifications can only be carried out by a distributor.
- In case of malfunctions or irregularities: shut down the system and contact your dealer.
- ⚠ For Installation without wall connection: use of top / bottom stopper is obligatory 📄!

As defined in the „Law of Liability for Products“ (§4 Prod-HaftG), for the liability of the manufacturer, for his products, the above information has to be regarded. The disregard of this manual, releases the manufacturer from his liability.


ACCESSORIES




1_ xx.xx.xxx




2_ xx.xx.xxx



3_ 10.07.023



4_ 10.01.039



5_ 10.07.05x

1_ Bottom track_ is supplied with double-sided adhesive tape (depending to version) and available as single-, double- and triple-track* (fig.: double-track, surface)

2_ Top track_ is to be mounted at the sealing and available as single-, double- and triple-track version (fig.: double-track) In special design also as four- and five-track

3_ Dust excluding brush_ is for providing the constant sealing to the wall and between two consecutive running doors; alternatively: Dust seal, rubber (item-no.: 10.26.040) for providing constant sealing to the wall







4_ Bracket for dust excluding brush

5_ Plugs for punching holes_ small adhesive cover plugs in different colours, which cover the punch holes in the top and bottom of the vertical profiles

Information:
The displayed items are available in different versions. Illustrations similar.

Examples of additional accessories (optional)


without illustration:

positioning for top track		(10.01.02x)
stopper f. bottom track		(10.01.03x)
top track stopper		(10.08.2xx)
Sliding door brake		(10.01.5x0)
pick up f. door connector		(10.01.134)
wall connection		(14.43.02x)


for more information please contact your supplier

INSTALLATION INSTRUCTION

PREPARE / MOUNT THE TOP TRACK

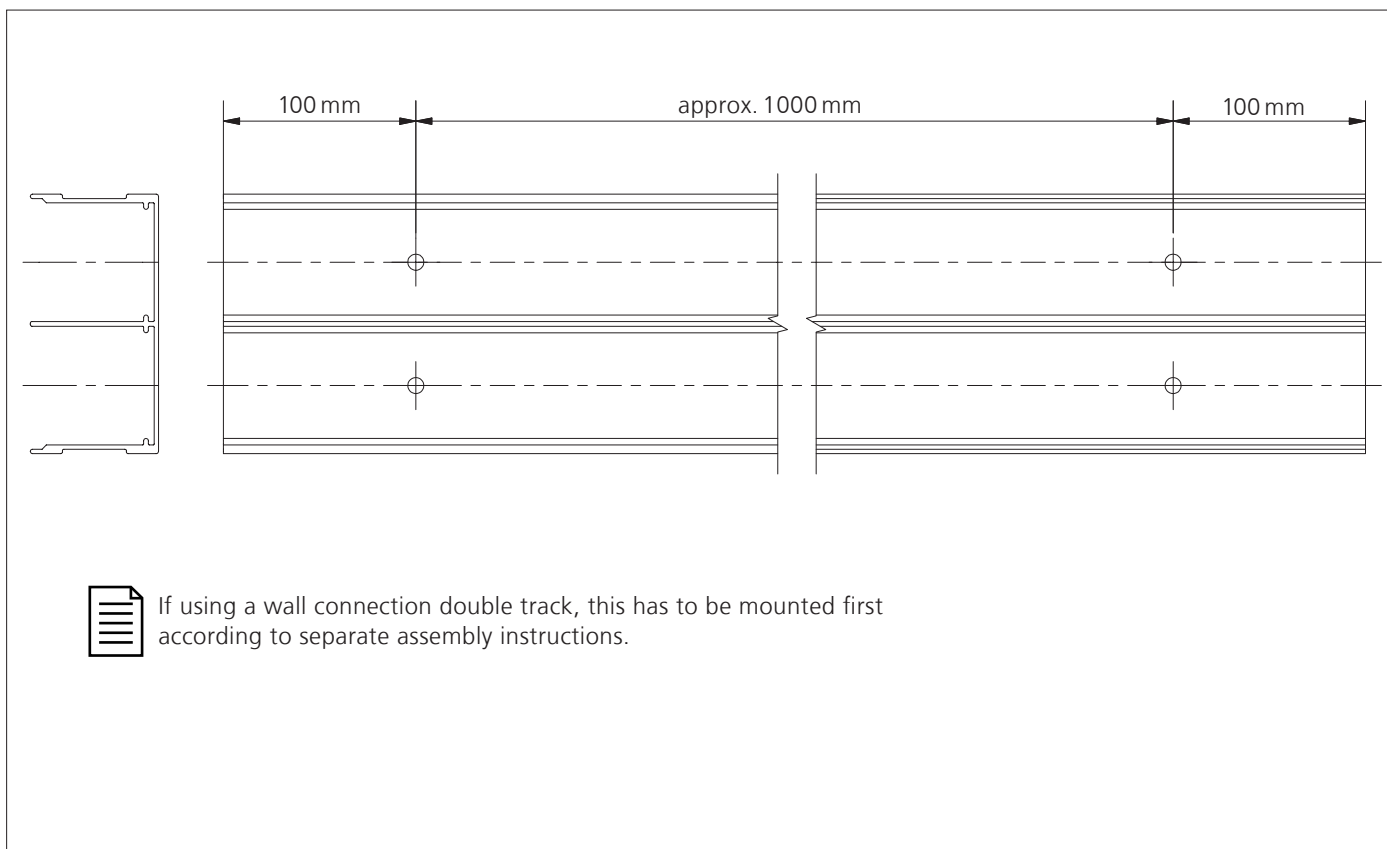


1_ Shorten top track to final dimension and drill holes

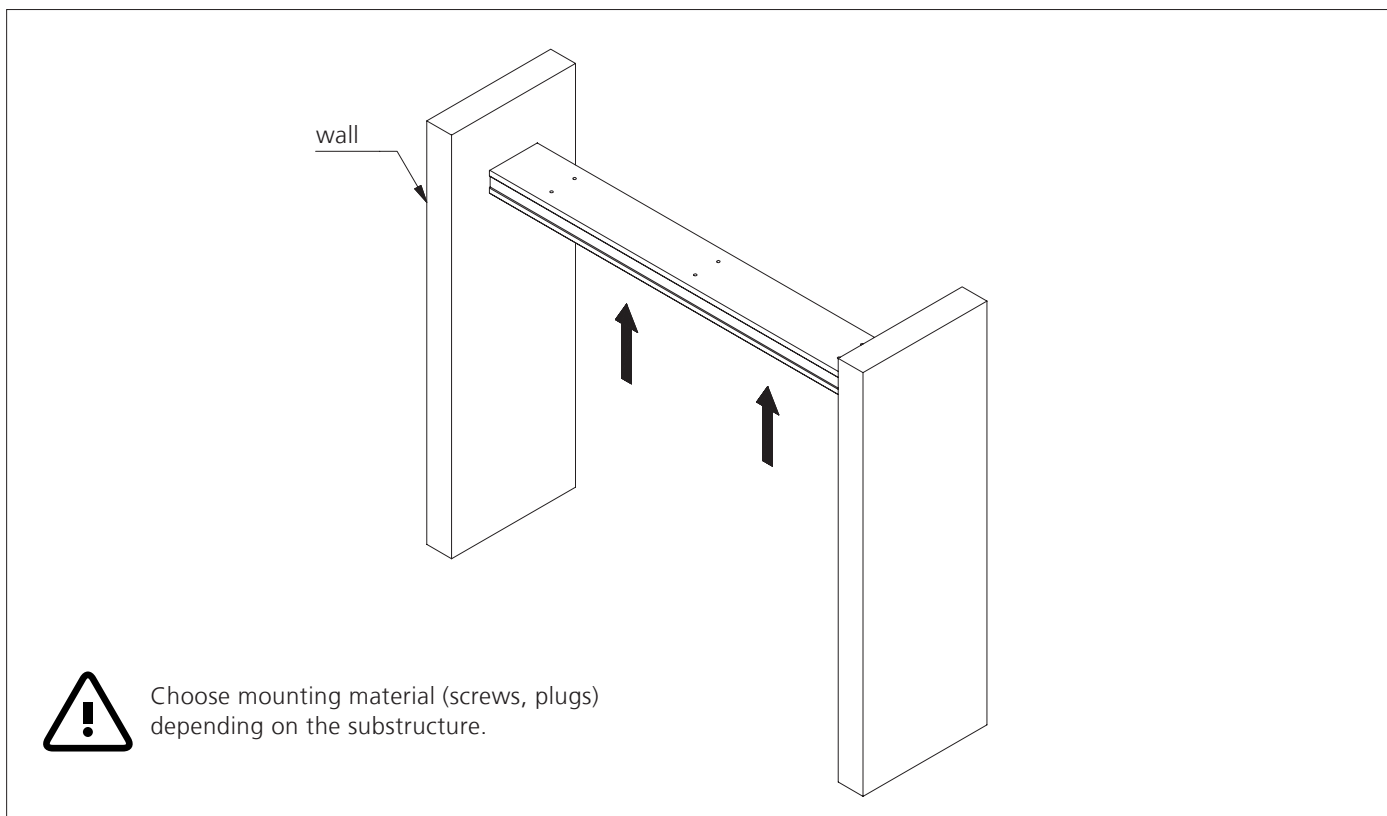


2_ Drill holes and mount top track (fig.: without ceiling)

INSTALLATION INSTRUCTION

SHORTEN BOTTOM TRACK / MARK POSITION

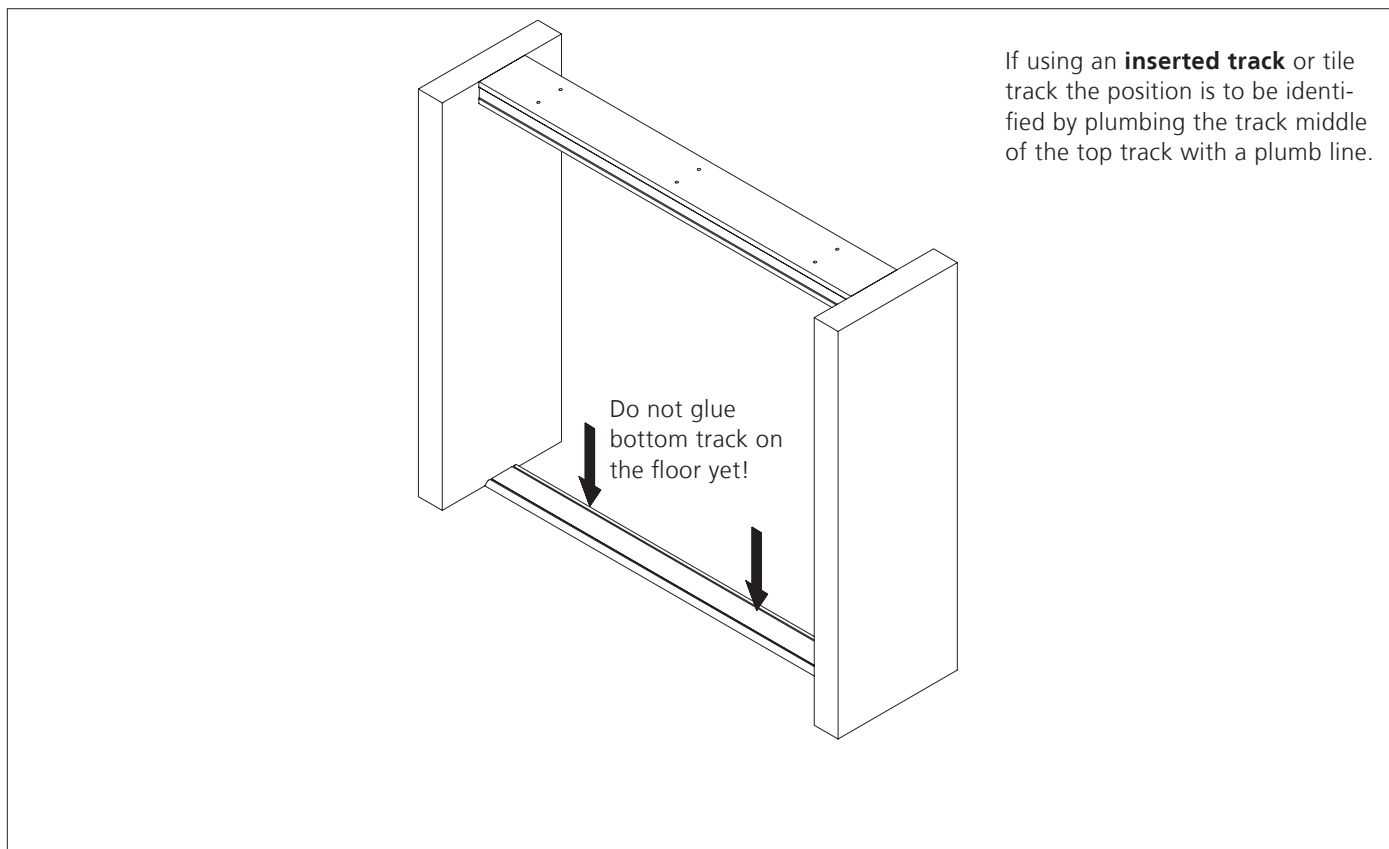


3_ Shorten bottom track to final dimension and position it nearly under the top track

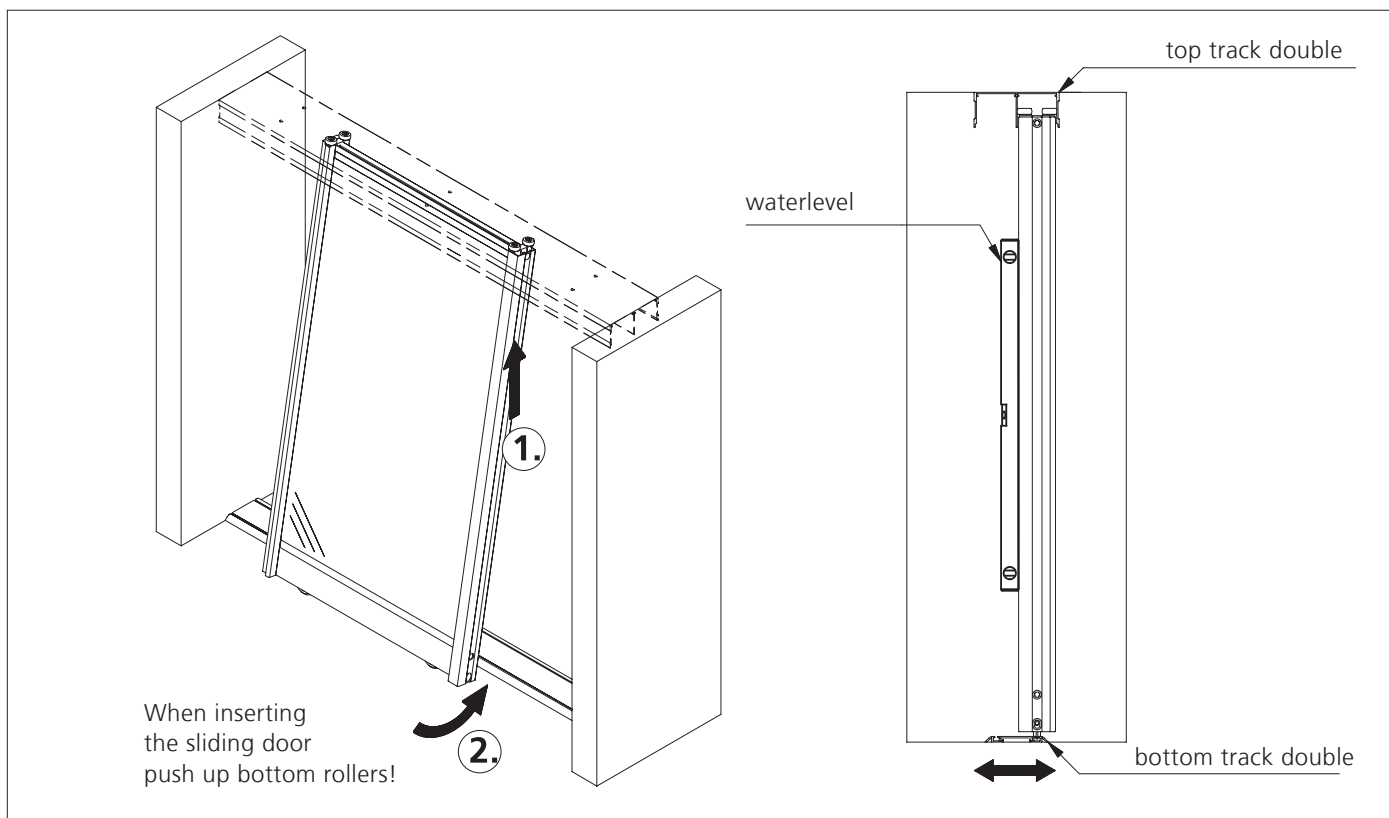


4_ Insert sliding door, align perpendicular by moving bottom track, mark position with masking tape

INSTALLATION INSTRUCTION

STICK ON BOTTOM TRACK / INSERT DOOR

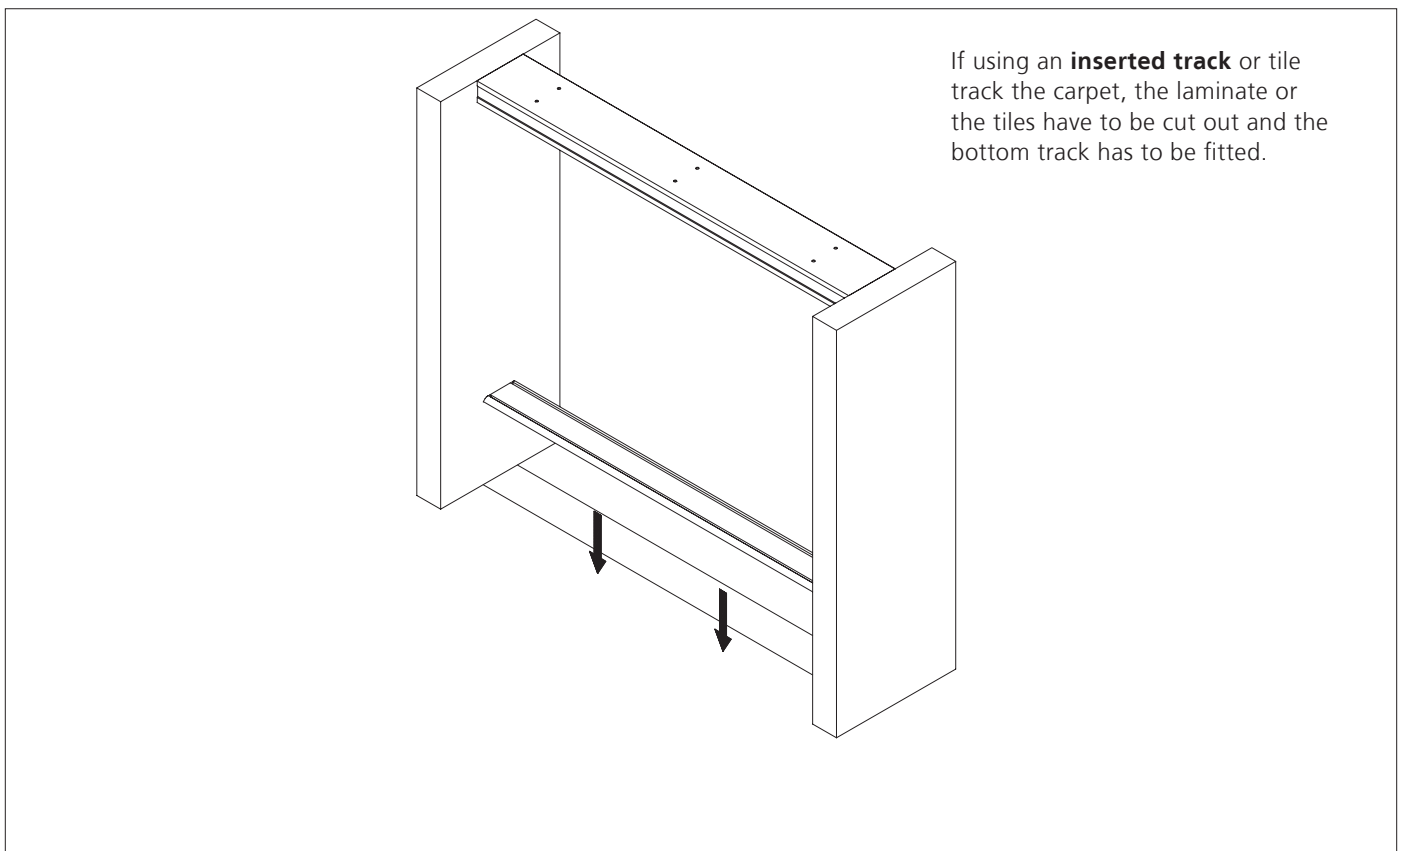



5_ Remove sliding door, clean surface (free of grease, impurities) and stick on bottom track at marked position

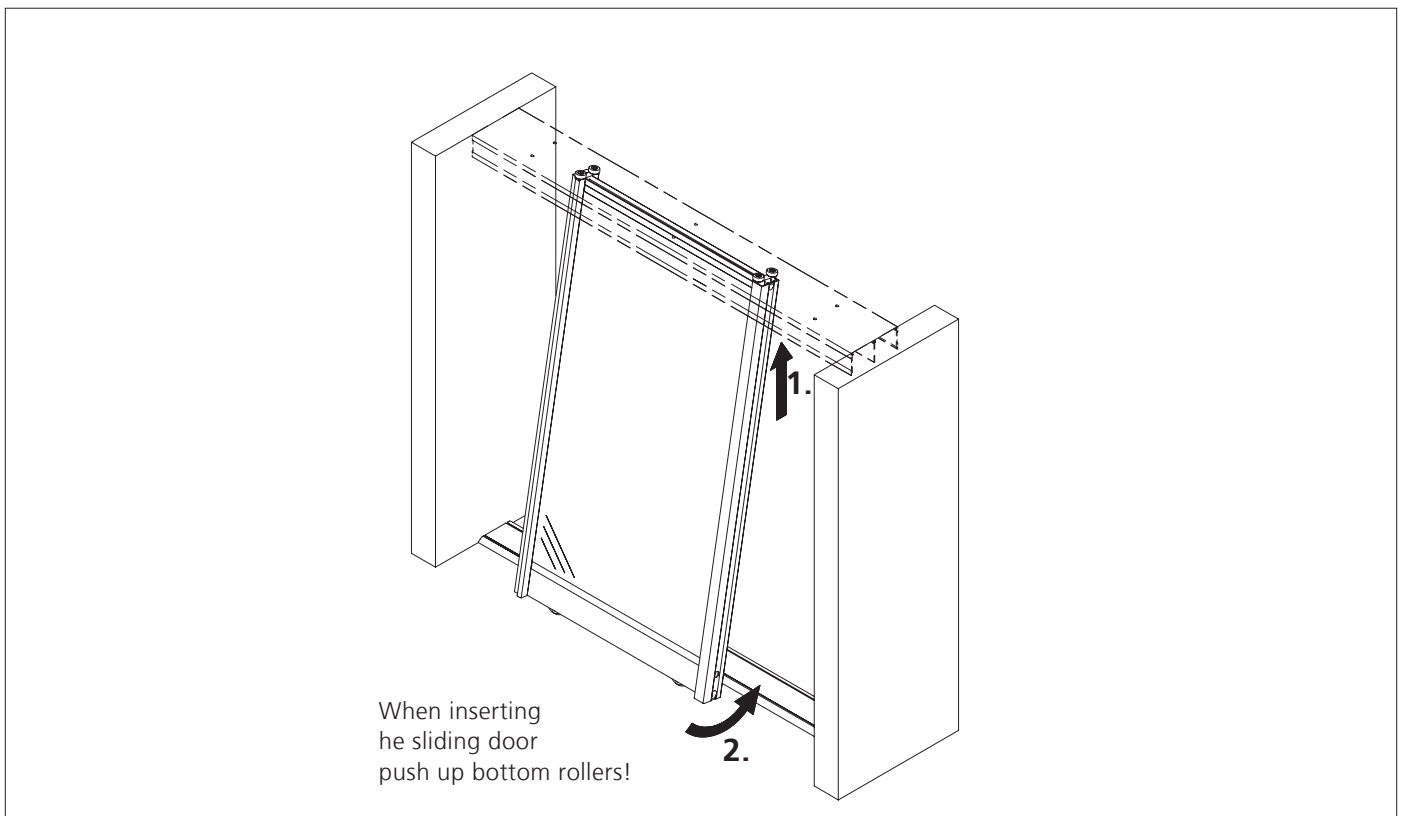

6_ Insert sliding door




INSTALLATION INSTRUCTION

ADJUST DOOR / STICK ON DUST EXCLUDING BRUSH

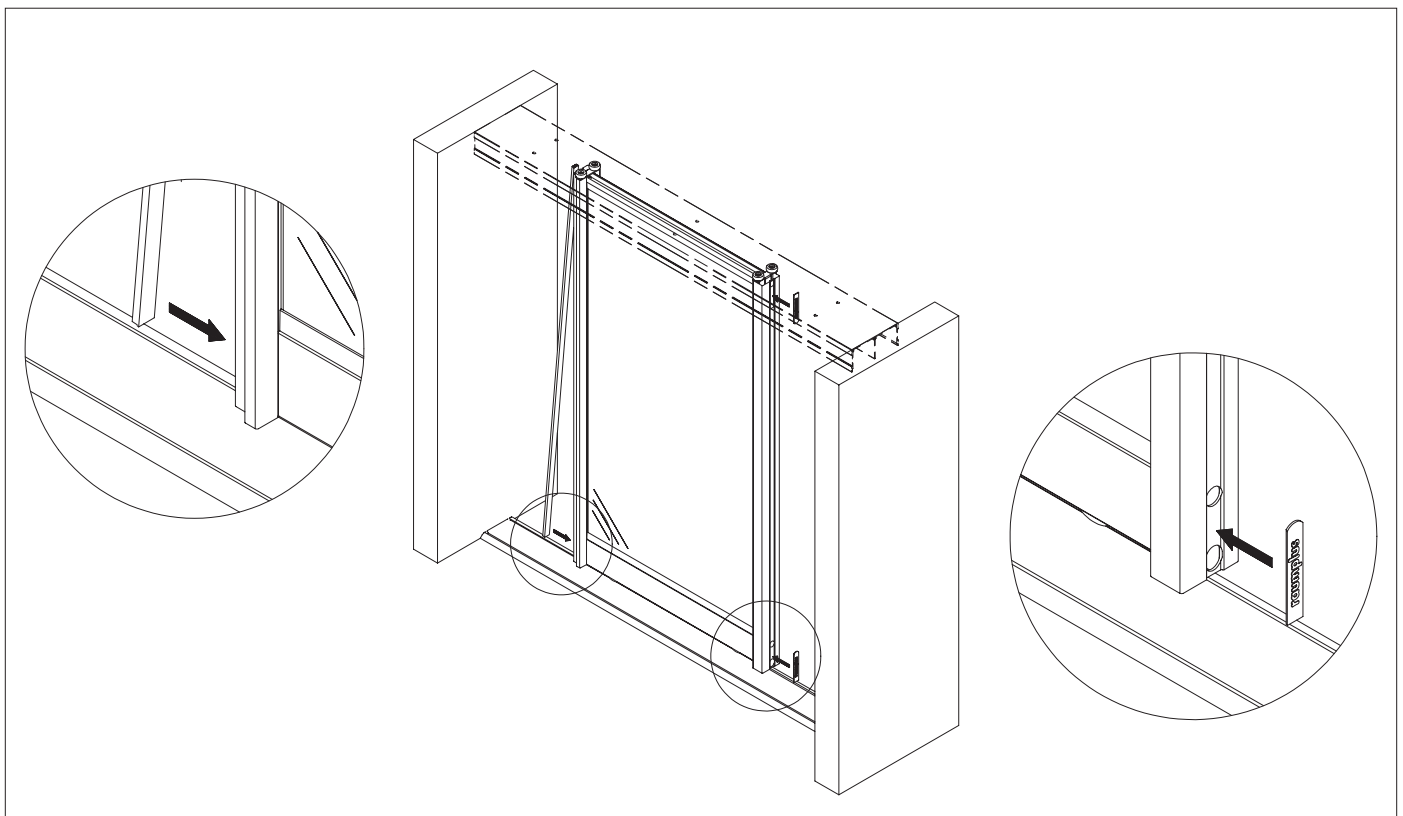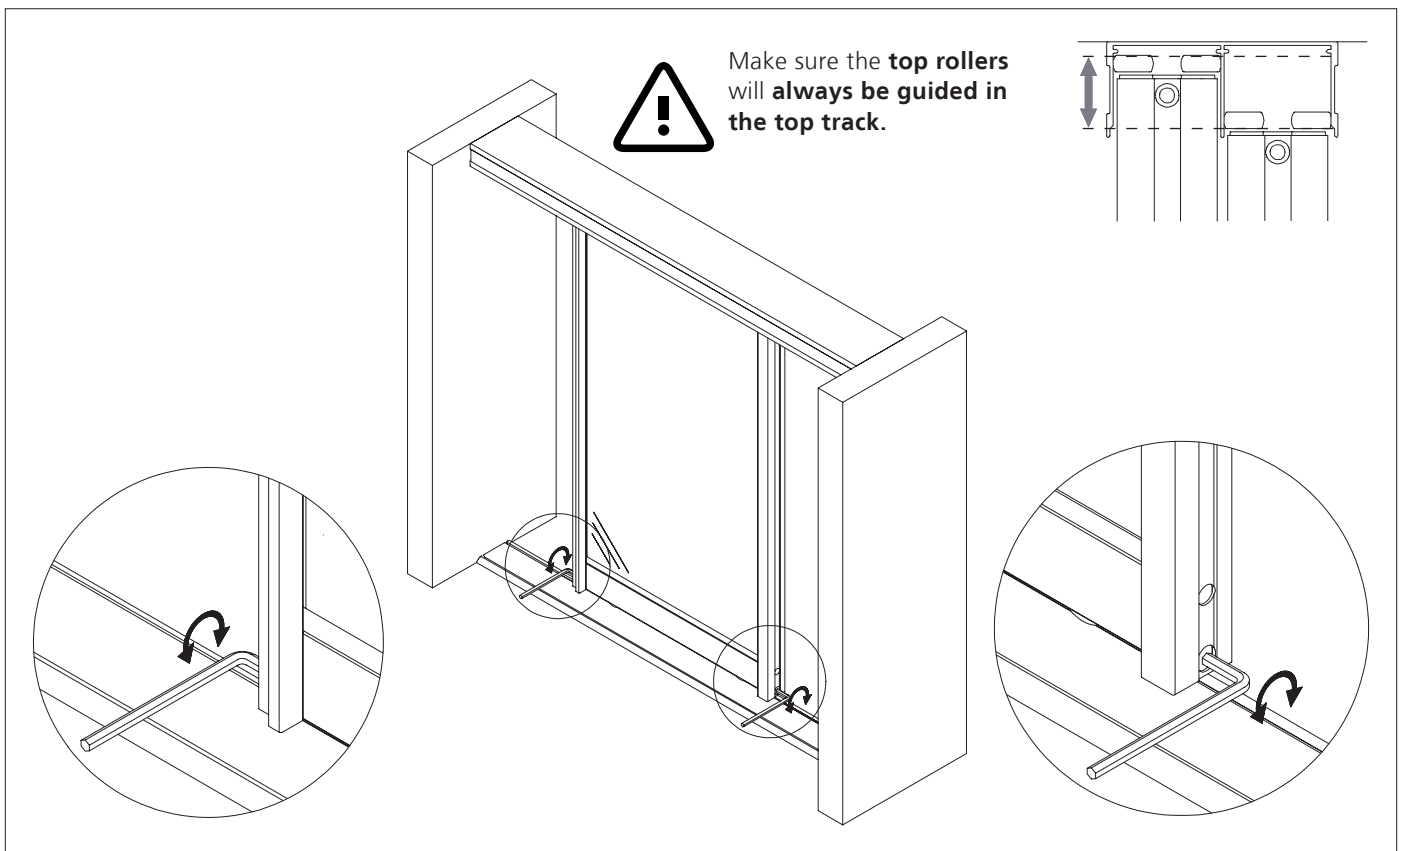


INSTALLATION INSTRUCTION

POSITIONS FOR DUST EXCLUDING BRUSH

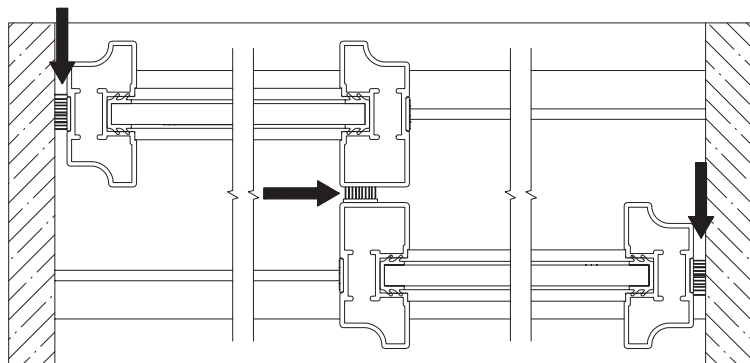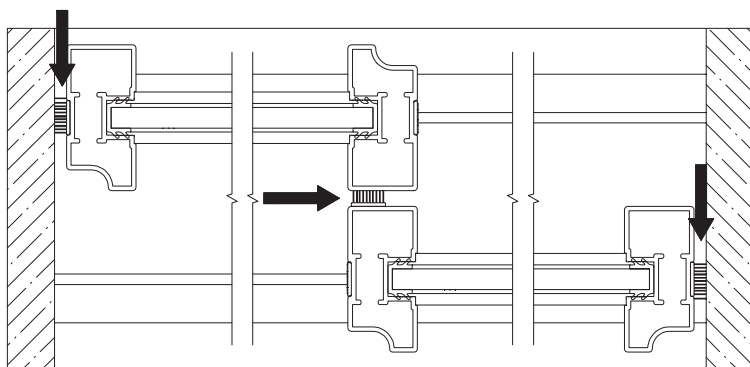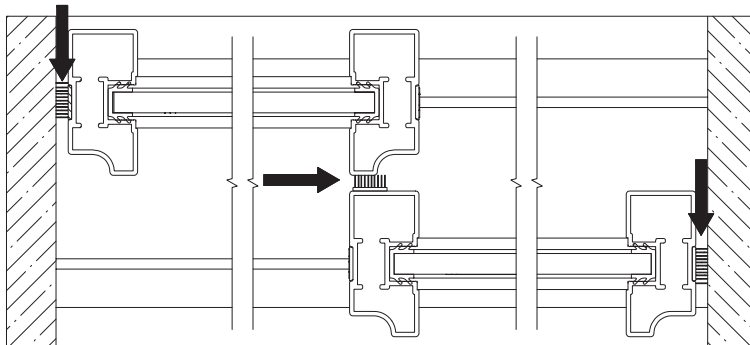


Examples with different disposed stiles

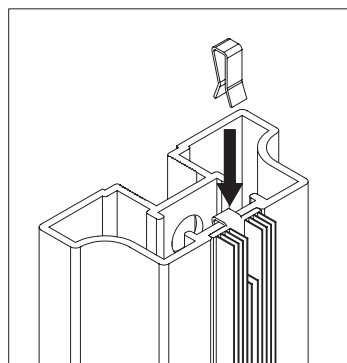

bracket for dust excluding brush

Stick on **dust excluding brush** and fix it with **bracket** on top and bottom.


For the remaining sides **plugs for punching holes** have to be stuck on at the top and bottom

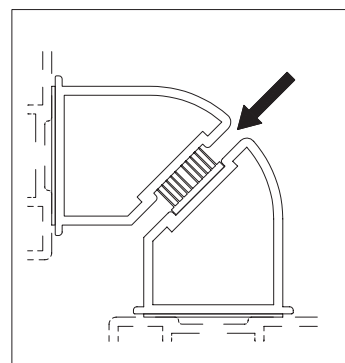


corner solution

INSTALLATION INSTRUCTION

90° - / 135°-CORNER SOLUTION

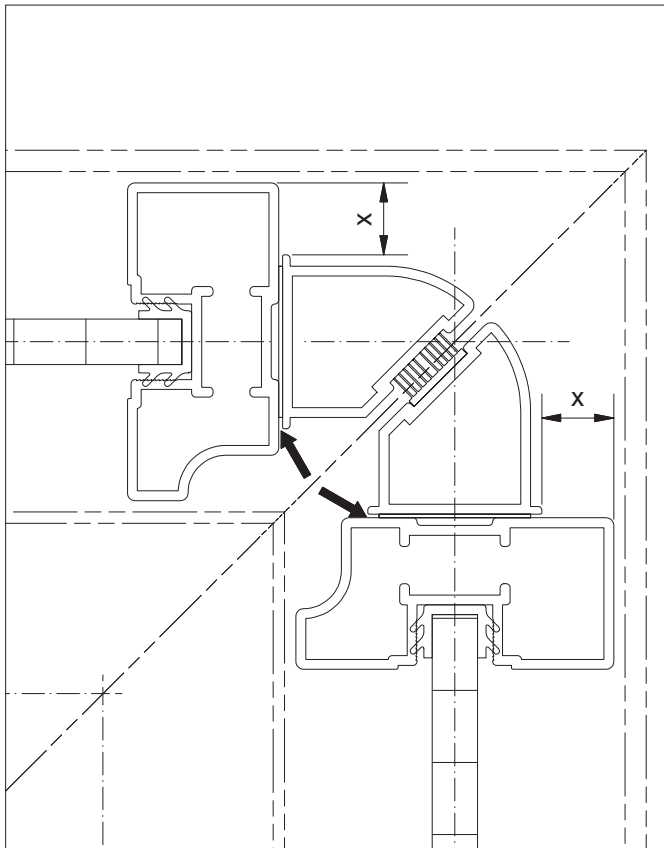

2_ 90° corner solution (fig.: S1500a)

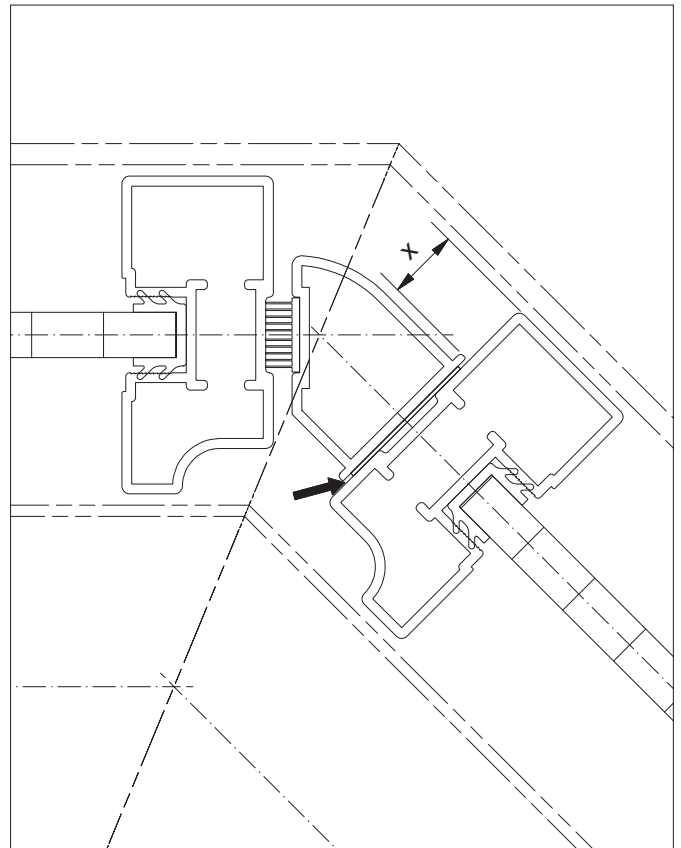

3_ 135° corner solution (fig.: S1500a)



The corner profiles are to be stuck on the vertical profiles with double-sided adhesive tape. (fig.: 2_ and 3_). At the **135°** corner solution only one **corner profile** is required.



At **corner solutions** the use of **bottom stoppers**, at double- / triple corner solutions supplemental the use of **top track stoppers** is intended (separate assembly instruction).

Important:

The corner solutions are applicable for the following series (the measure "x" indicates the **distance** of the corner profile to the next outer edge of the vertical profile):

90° corner:

S640	(x = 6 mm)
S650	(x = 1 mm)
S653	(x = 6 mm)
S720	(x = 1 mm)
S731	(x = 6 mm)
S750 asym.	(x = 4 mm)
S753	(x = 4 mm)
S791	(x = 3 mm)
S800	(x = 6 mm)


S1500	(x = 9 mm)
S3000	(x = 9 mm)
S1200	(x = 9 mm)
S8000	(x = 9 mm)


135° corner:

S1500	(x = 9 mm)
S3000	(x = 9 mm)
S1200	(x = 9 mm)
S8000	(x = 9 mm)


For further series please contact your responsible retailer.


POSITIONS OF THE BOTTOM TRACKS SYSTEM 34

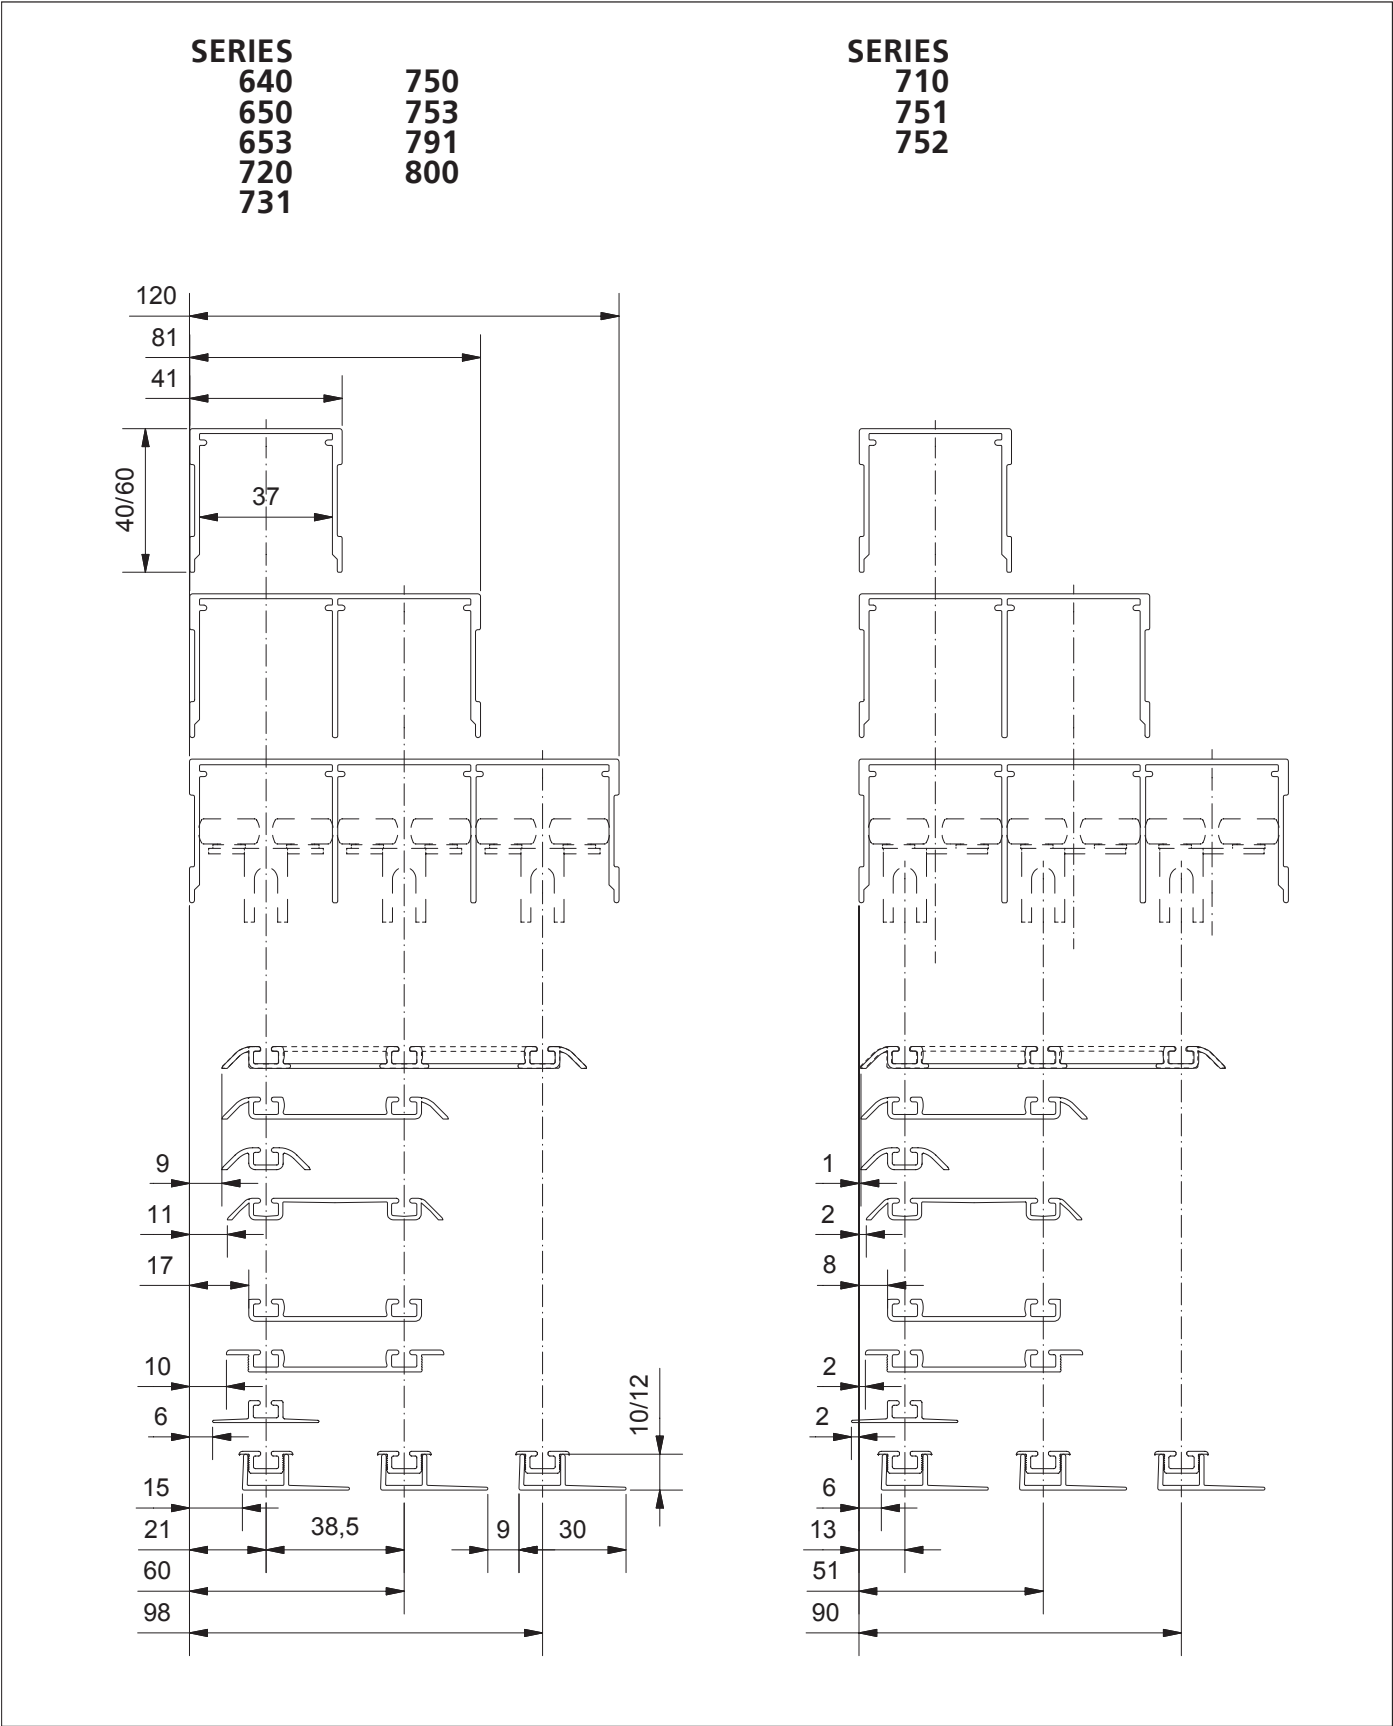

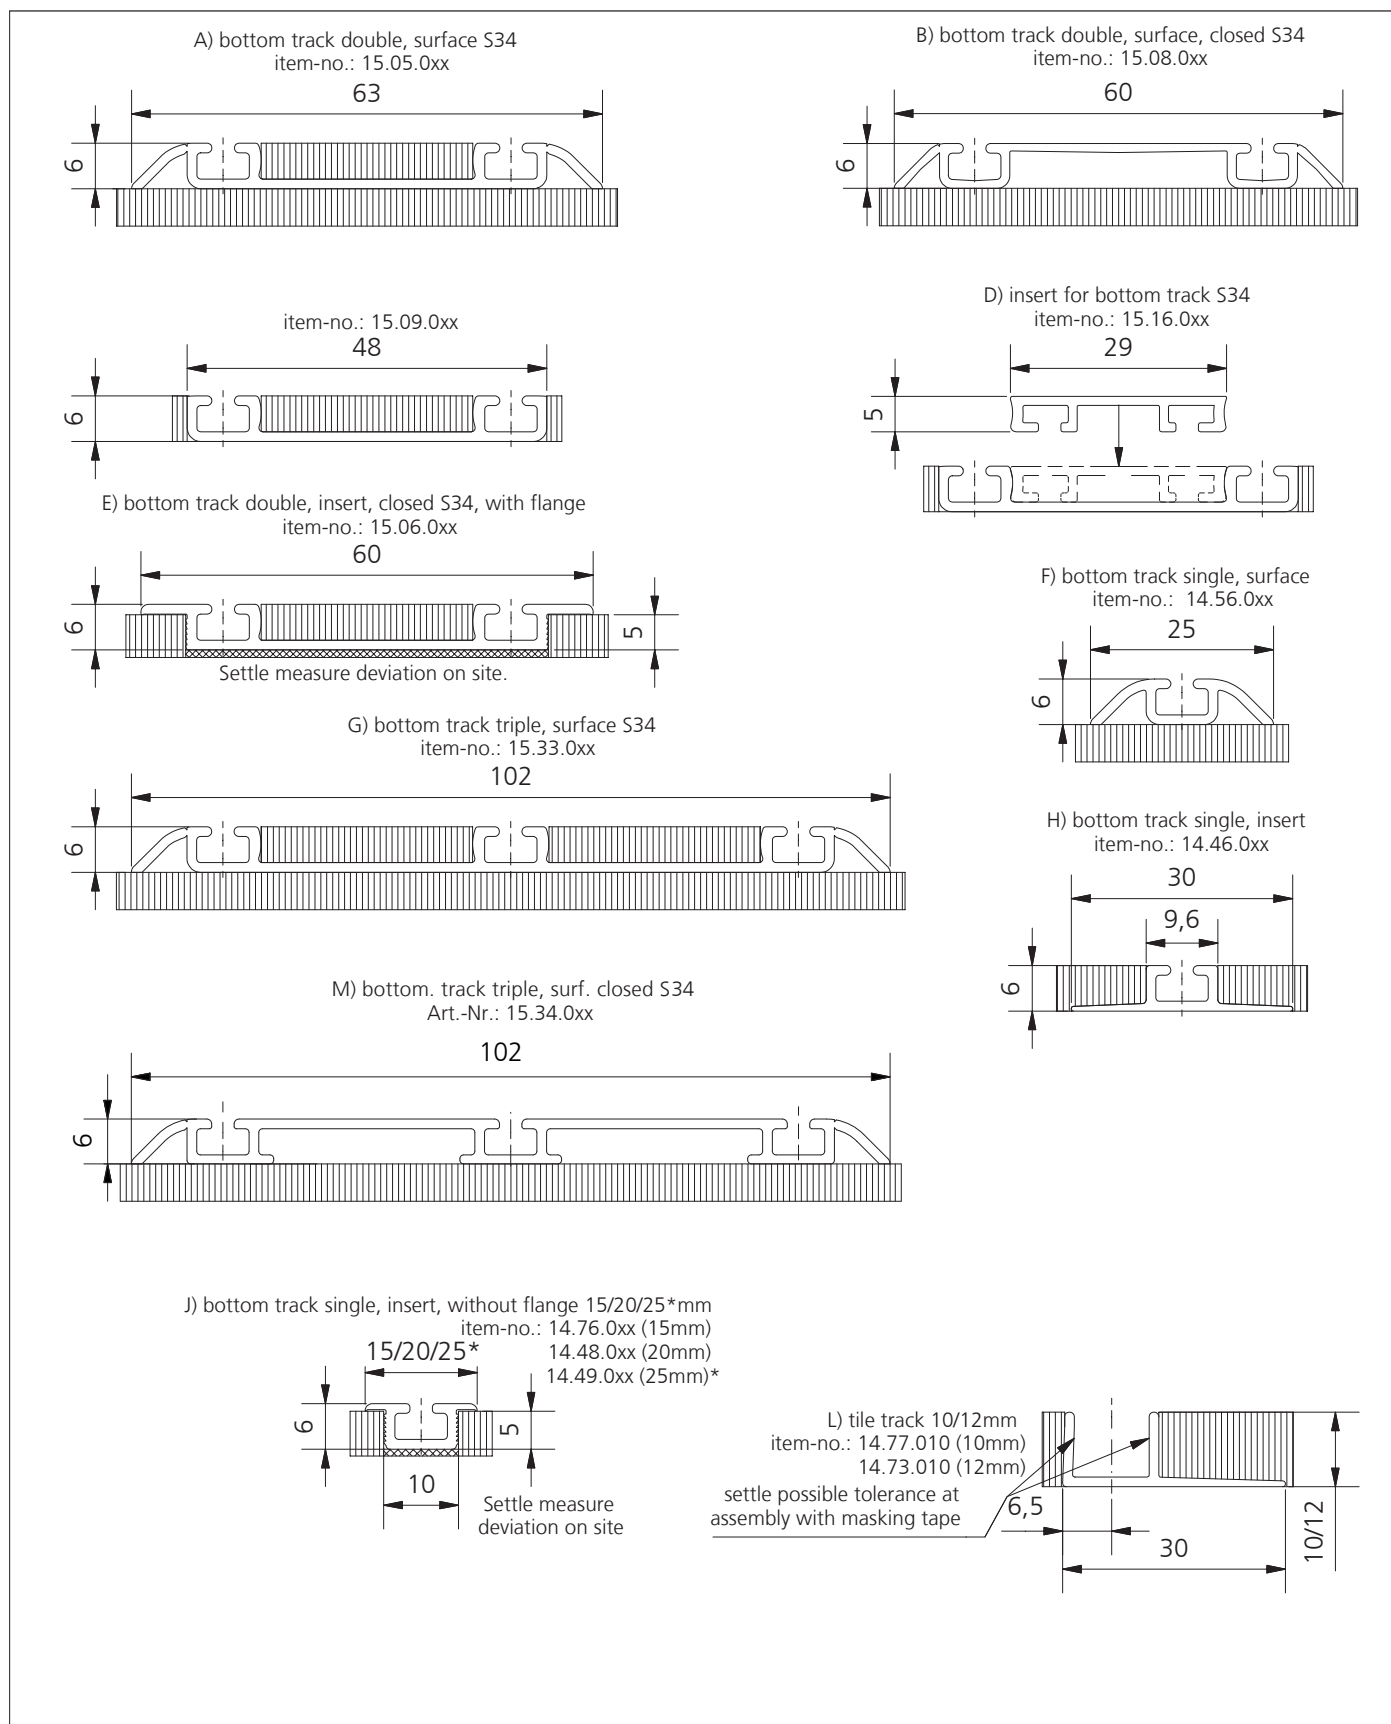

POSITIONS OF THE BOTTOM TRACKS SYSTEM 42

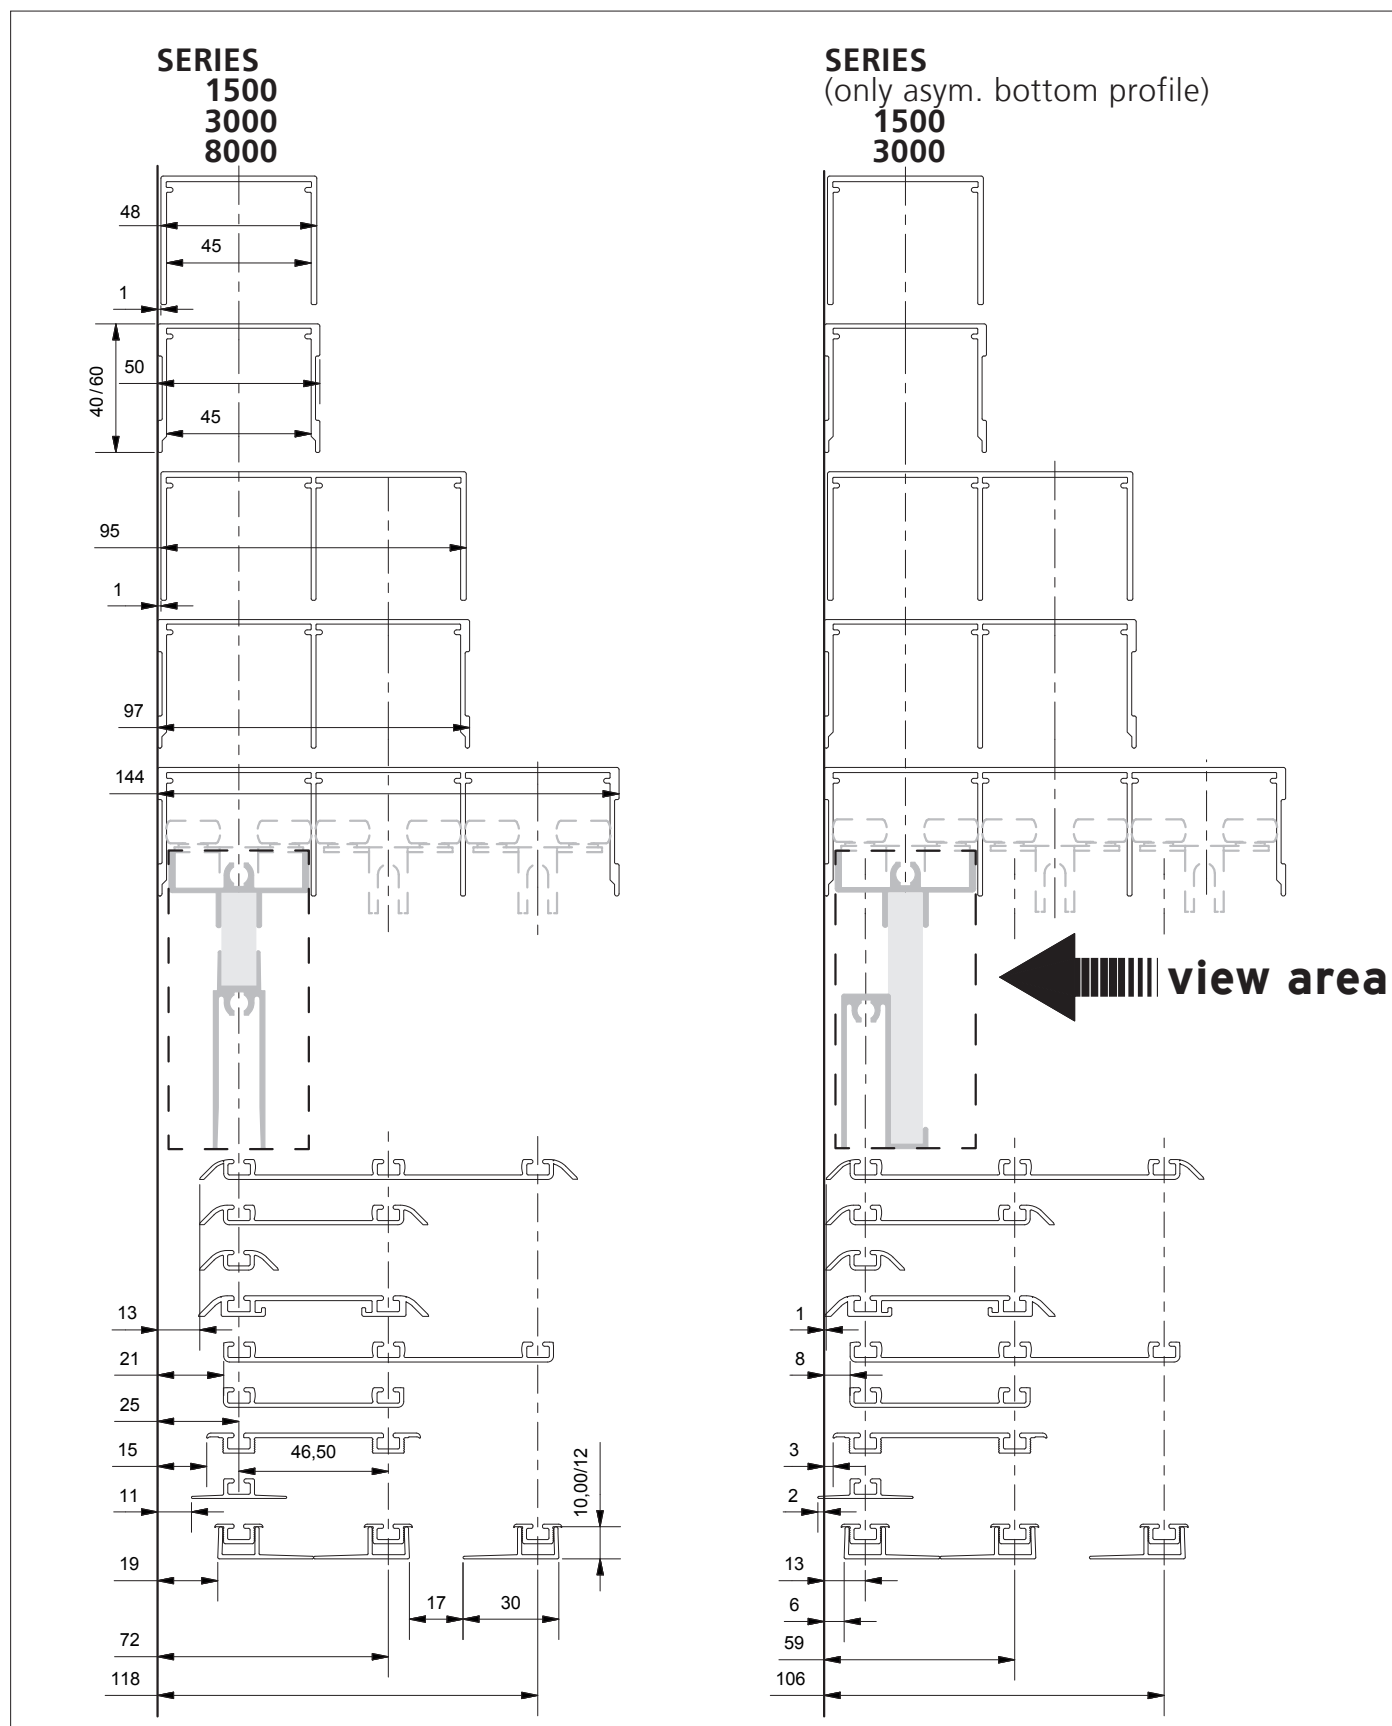

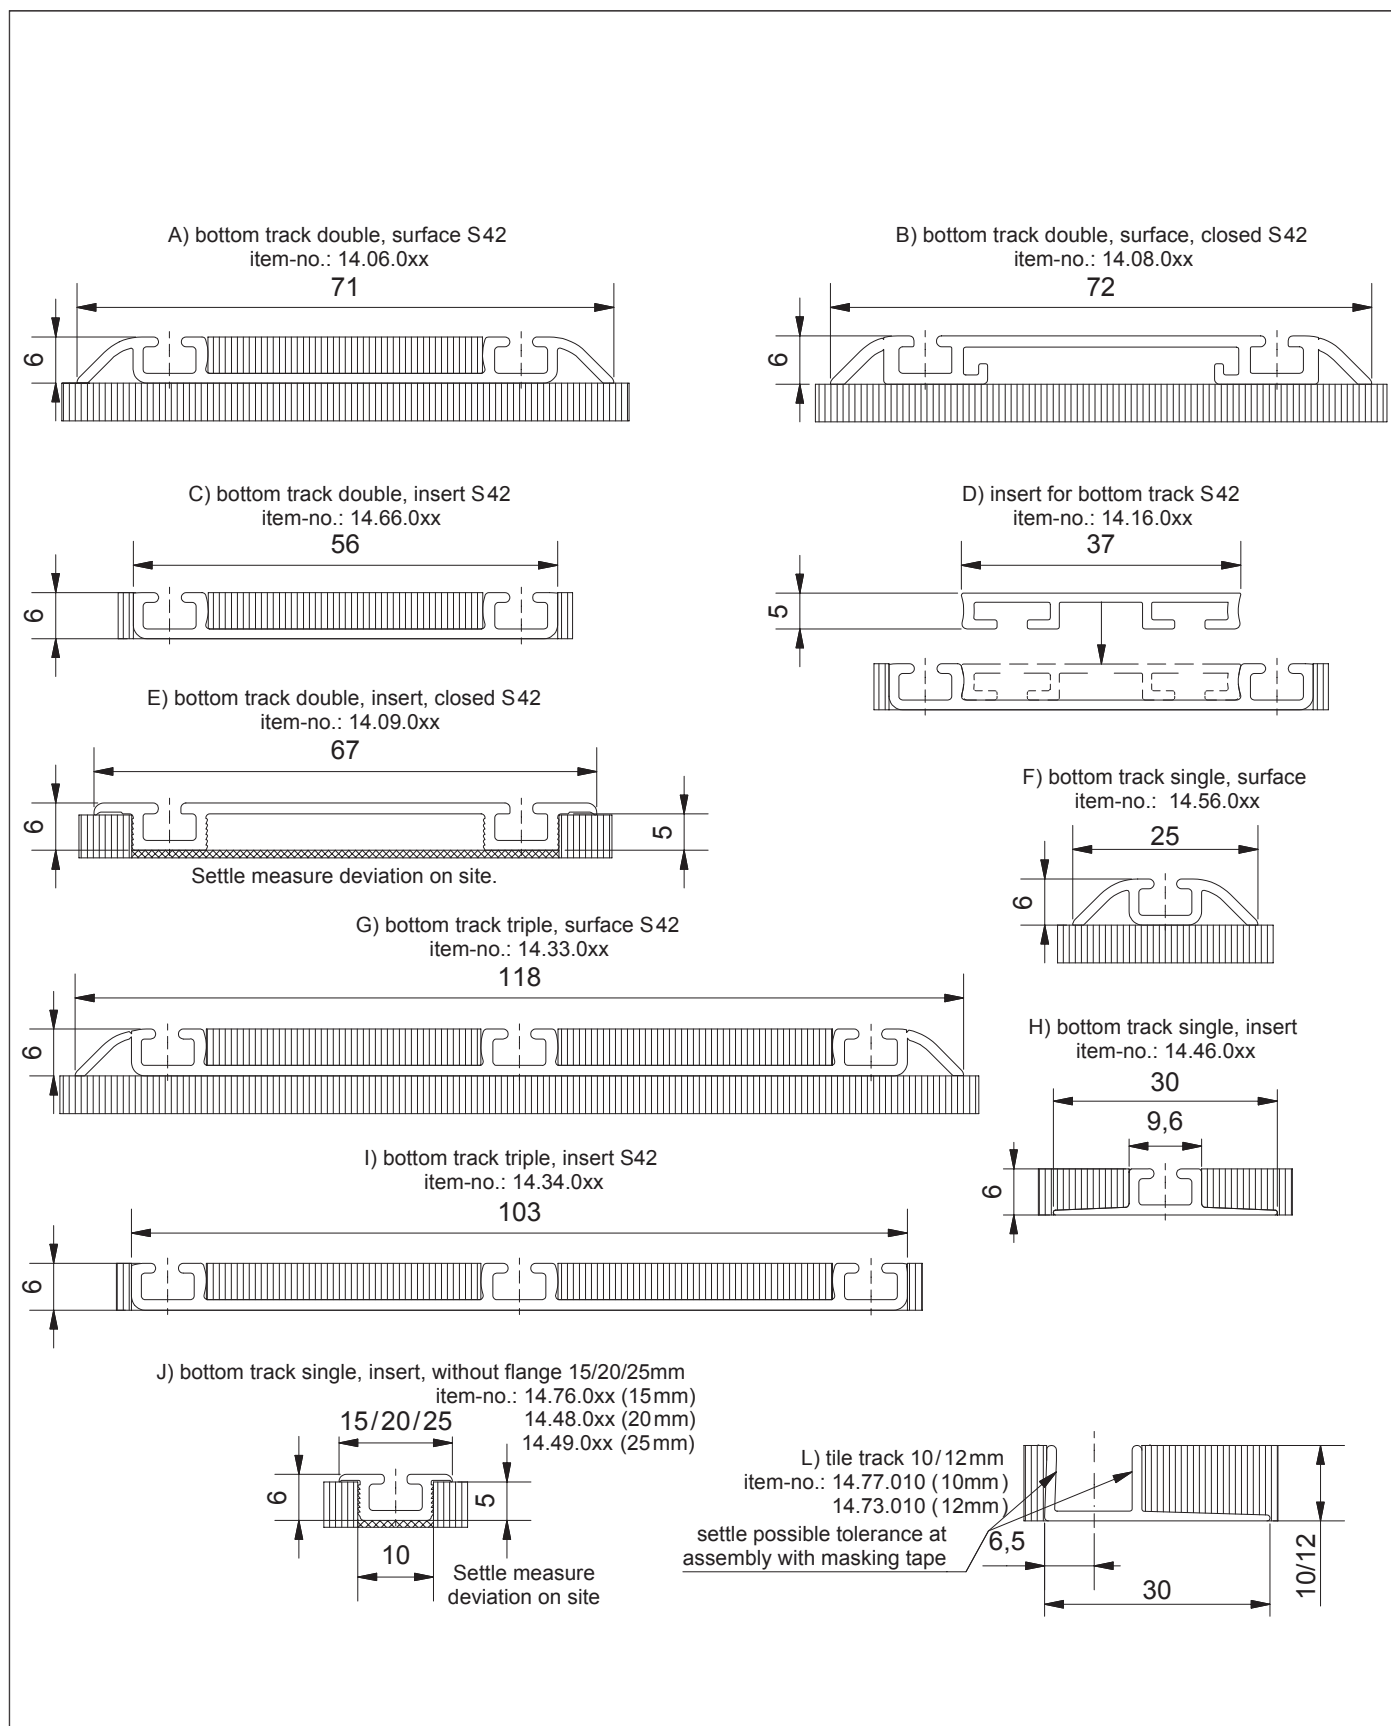

POSITIONS OF THE BOTTOM TRACKS SYSTEM 42

