



SLIDING DOOR: INSTALLATION INSTRUCTION

TOP TRACK POSITIONING

short version 3.1 (2015-08-21)

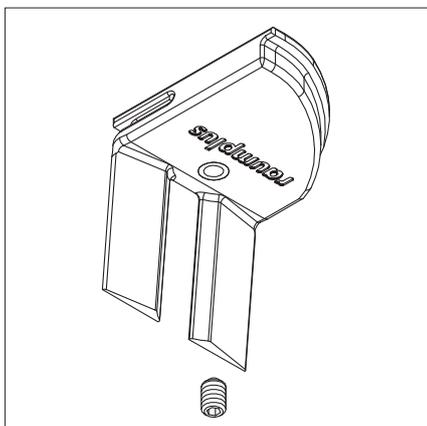

1_ Top track positioning
 _ System 26 (10.26.026)
 _ System 34 (10.01.026)
 _ System 42 (10.01.027)

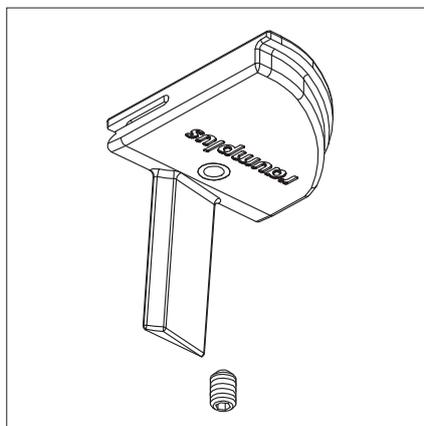

2_ Lateral positioning for top tracks
 for S751 / S710
 (10.01.036)


TOOLS:

(without claim of completeness)

- 1_ Allen key 2mm
- 2_ Carpenters pincers

Note

- Please note that the assembly must only be performed by qualified and trained staff in strict compliance with all details indicated in this document. Improper installation in variation from manufacturer's specification may cause defects and danger, thus endangering the safe fixing of the product as well as the safety of the prospective user. The liability of the manufacturer shall be excluded in case of defects and consequential damages resulting from incorrect assembly of this product.
- **Top track positioning not in conjunction with the sliding door brake.**

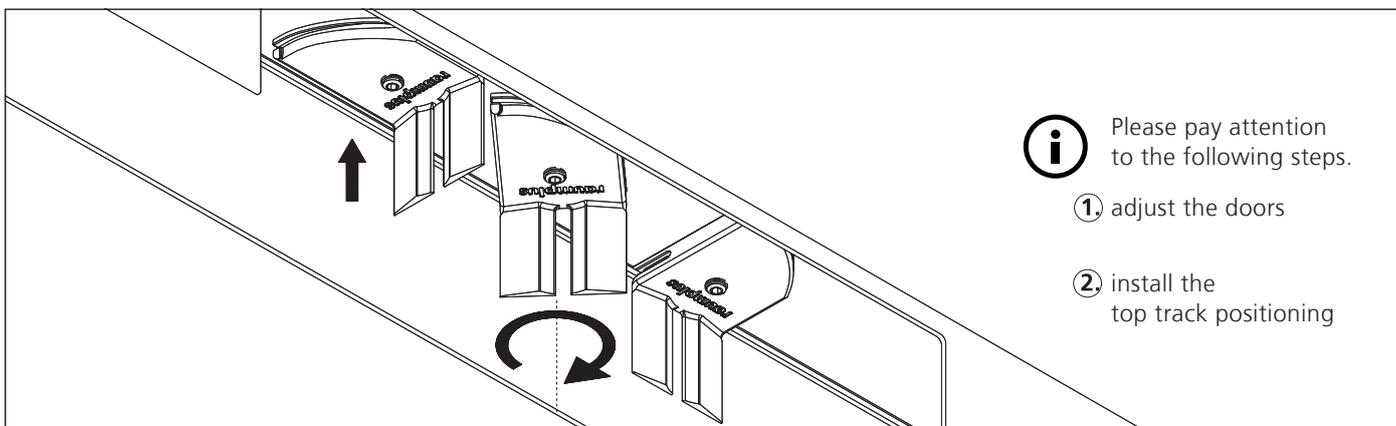

- i** Please pay attention to the following steps.
- ① adjust the doors
 - ② install the top track positioning

1_ Put the top track positioning into the top track and turn it in


Install

easy medium difficult


Subject to technical changes.

raumplus


INSTALLATION INSTRUCTIONS

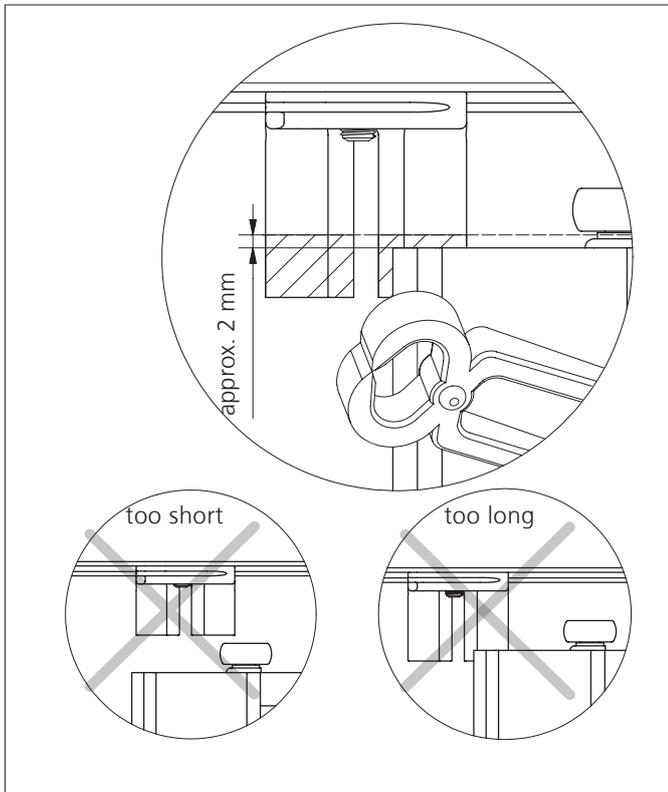


2_ Top track positioning, has to be shortened

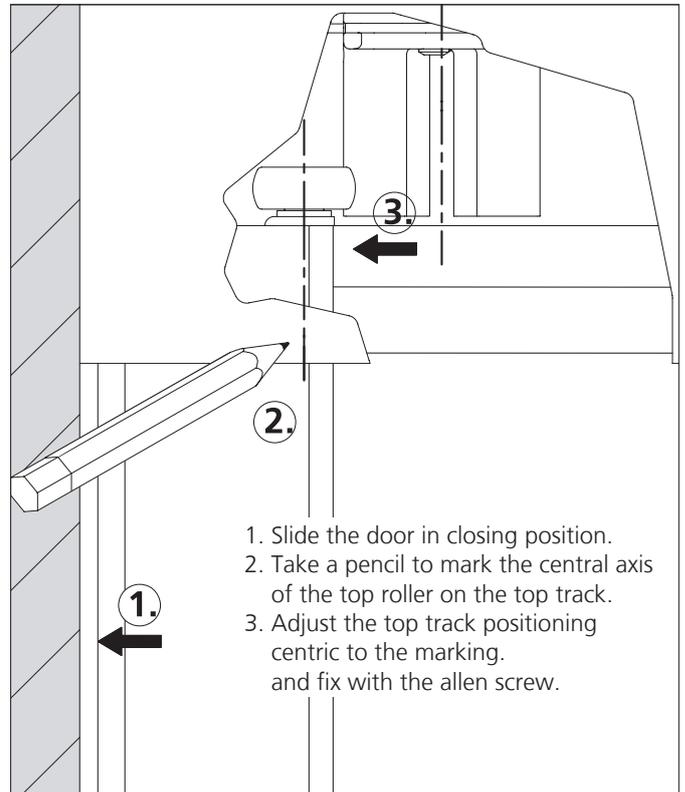

3_ Central axis to mark

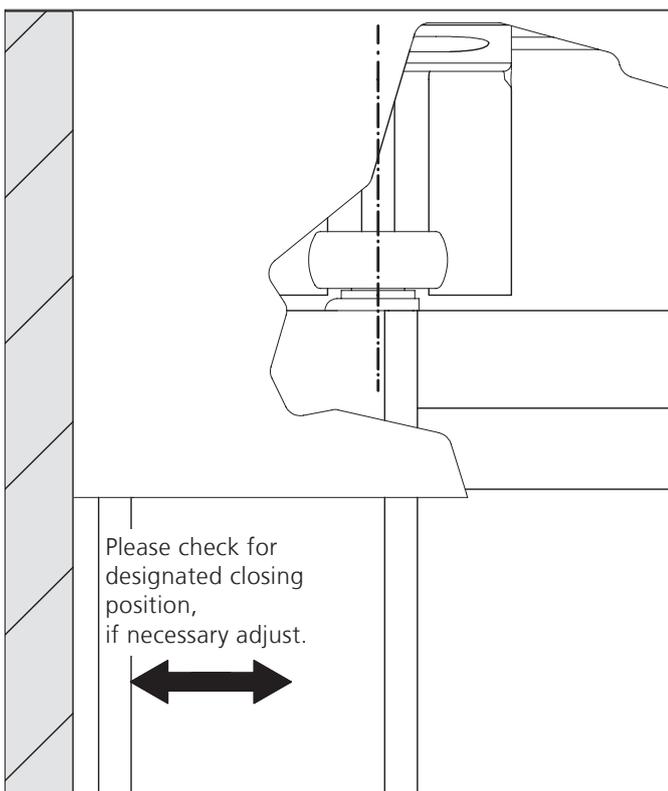

4_ Functiontest

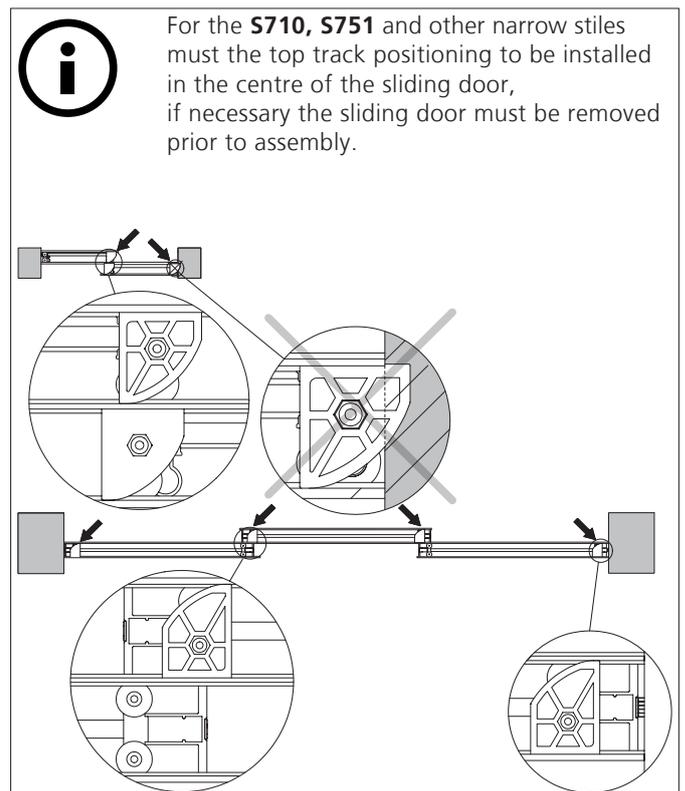

5_ Positioning examples for the top track positioning